

P 280 AXE *Smart*

PALFINGER


LIFETIME EXCELLENCE

**RELIABILITY, SAFETY AND PERFORMANCE
IN THE MOST COMPACT CONFIGURATION
OF THE MARKET**




P 280 AXE *Smart*

WORKING DIAGRAMS

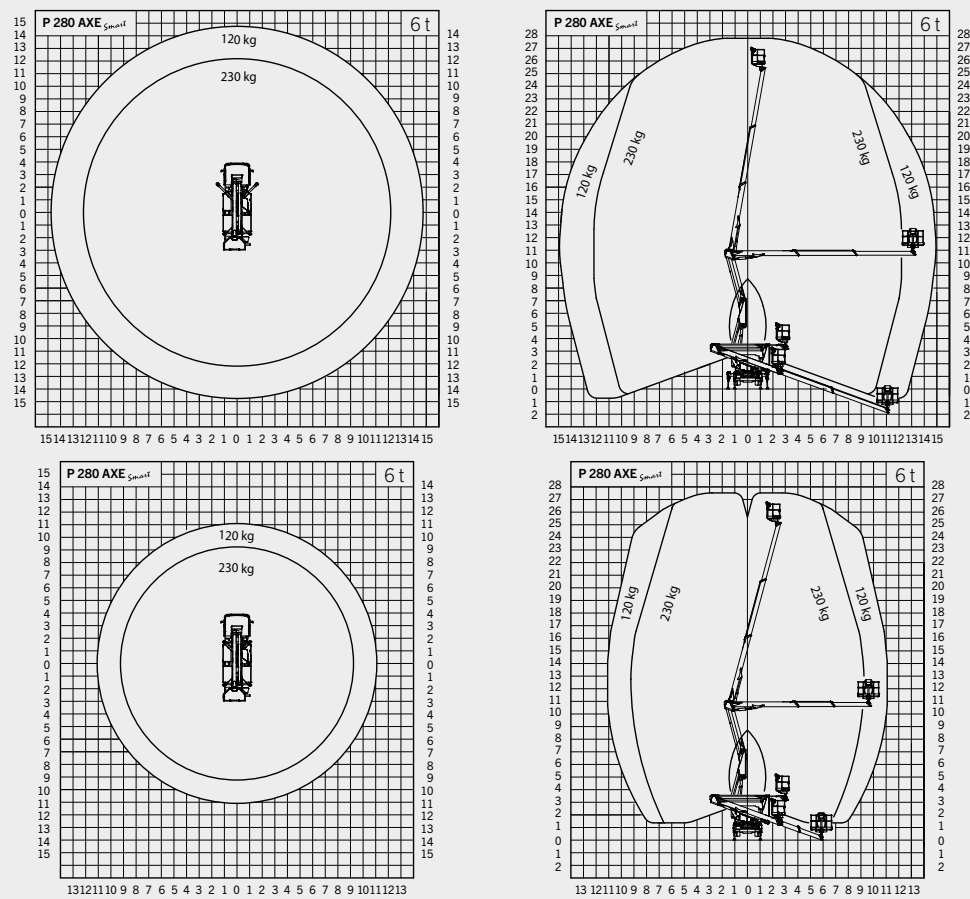

DIMENSIONS

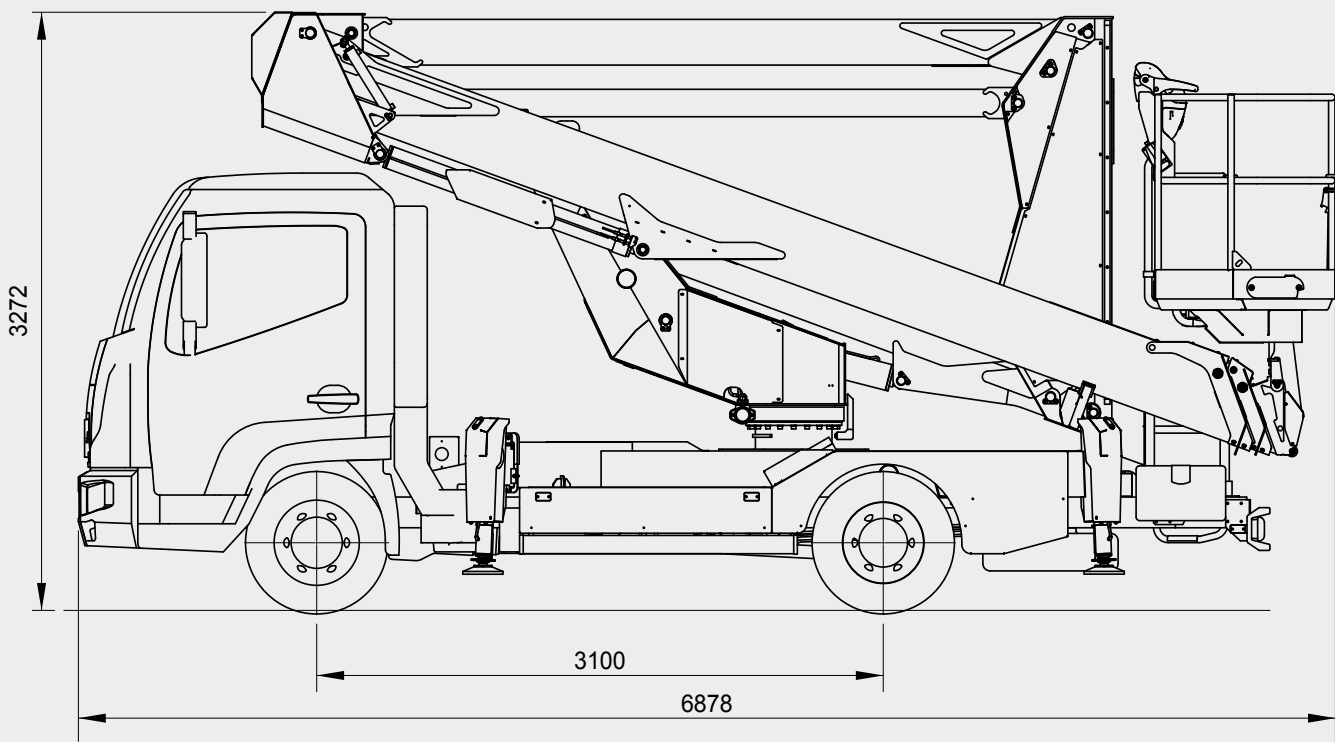

- Compact design and easy operation
- Ergonomic design
- Flexible access to heights thanks to combination of joint and telescope
- High manoeuvrability thanks to the extremely short wheelbase
- Safe working
- Professional PALFINGER quality



TECHNICAL SPECIFICATIONS

Max. working height	28 m
Max. basket bottom height	26 m
Max. outreach	15 m
Angle of main boom	-20° a + 80°
Turntable rotation	370°
Basket rotation	90°+90°
Basket load	230 kg
Size of basket	1,69 x 0,93 x 1,1 m
Height in transport position	3,27 m
Width in transport position	2,25 m
Length in transport position	6,87 m

OPTIONAL

- Fiberglass basket
- Insulation 1000 V
- Aluminium Side bars 200 mm
- Basket load device
- Electric motor 230 V
- Working adjustable light 60 W on the basket
- Customised paintwork boom

LIFETIME EXCELLENCE


THE RESULT IS **PALFINGER ACCESS PLATFORMS** FEATURING THE MOST STATE-OF-THE-ART HEIGHT TECHNOLOGY THAT ACHIEVE ABSOLUTE PEAK PERFORMANCES, EVEN WHEN CONFRONTED WITH THE MOST DIFFICULT OF JOBS IN PRACTICE. **DEVELOPED FOR THE GLOBAL MARKET, DESIGNED FOR THE FUTURE.**

BETTER
SOLUTIONS

BETTER
EFFICIENCY

BETTER
ERGONOMICS

HIGHER VALUE
RETENTION



HIGHER
AVAILABILITY

HIGHER
SERVICEABILITY

BETTER
ECOLOGY

MORE
RELIABILITY

For further information please visit: www.palfinger.com/thebrand